



Guidance for swapping keycaps on MINILA-R Convertible 63 key



This is an instruction of where to swap keys when using DIP switches.

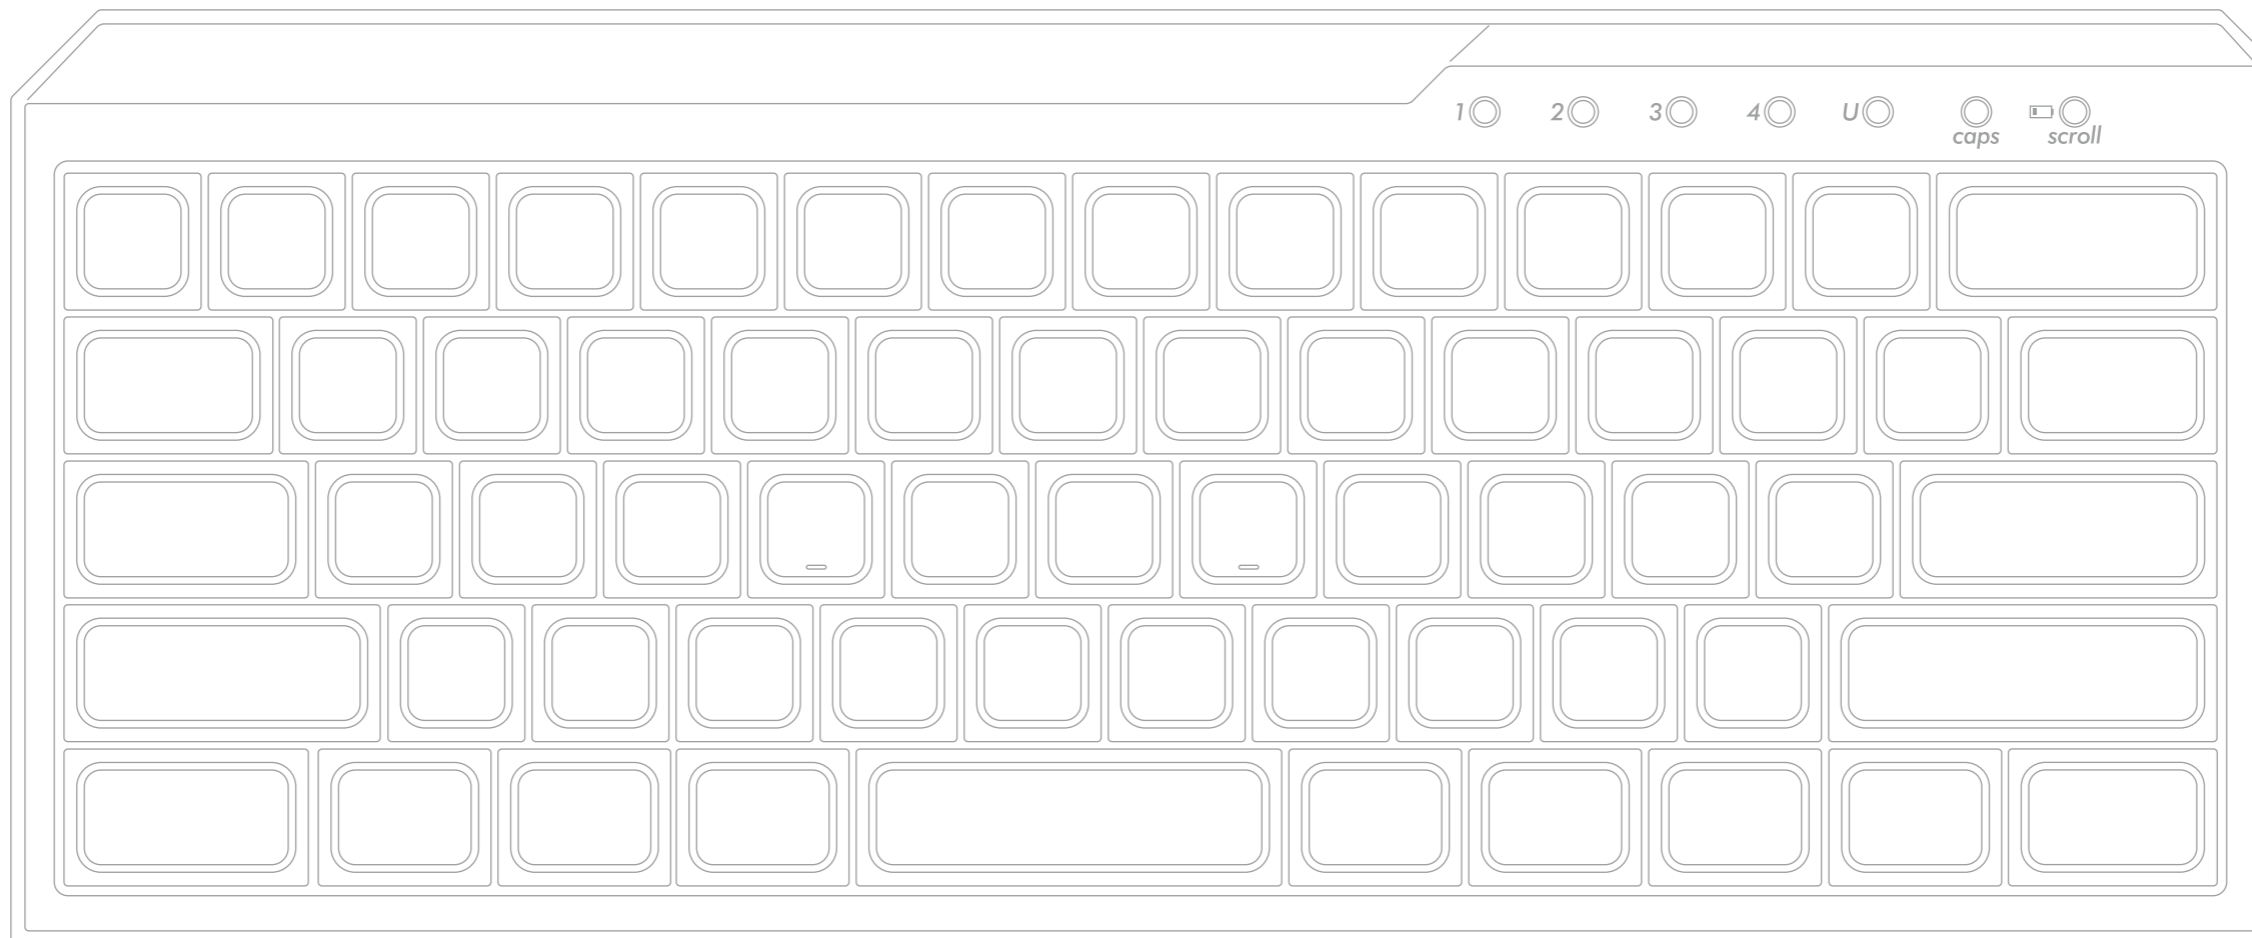

DIP switch – all OFF

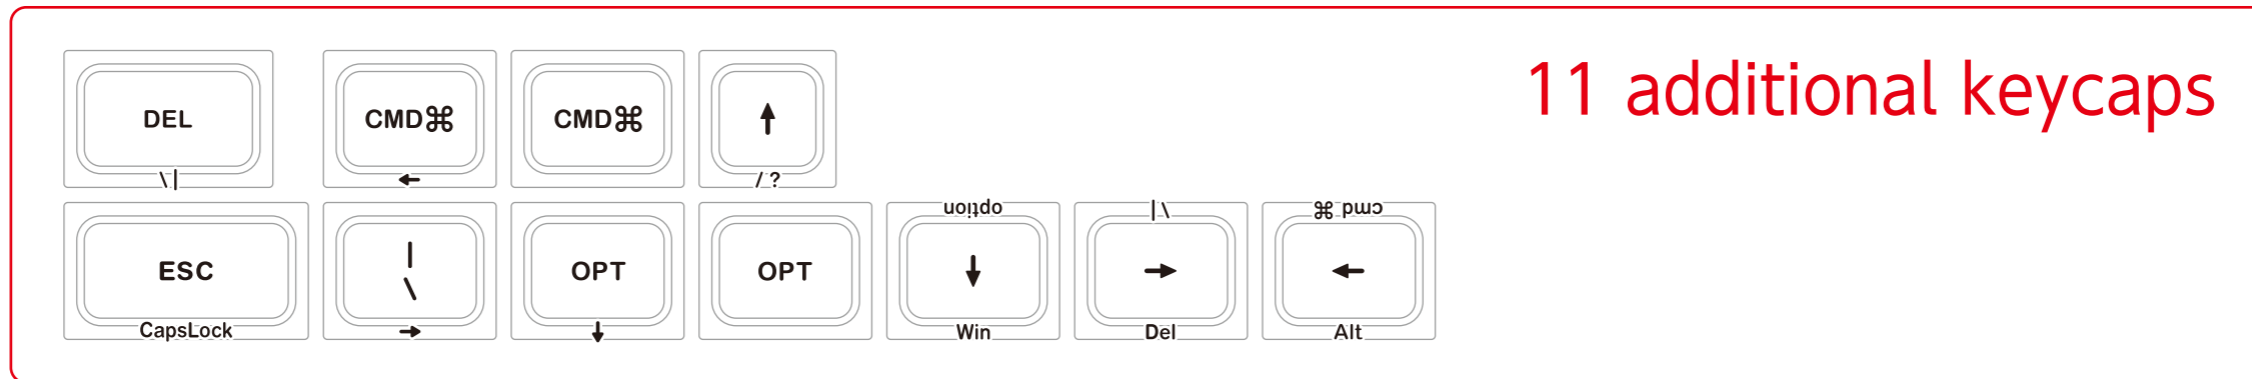


11 additional keycaps




DIP switch 1 – ON
 Swap CapsLock key and Left Ctrl key




Use Ctrl key and Capslock key as they are. No change is needed.

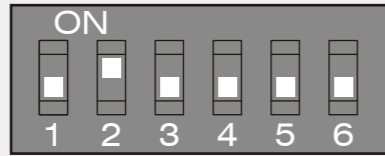

DIP switch 2 – ON
 Swap CapsLock key and ESC key

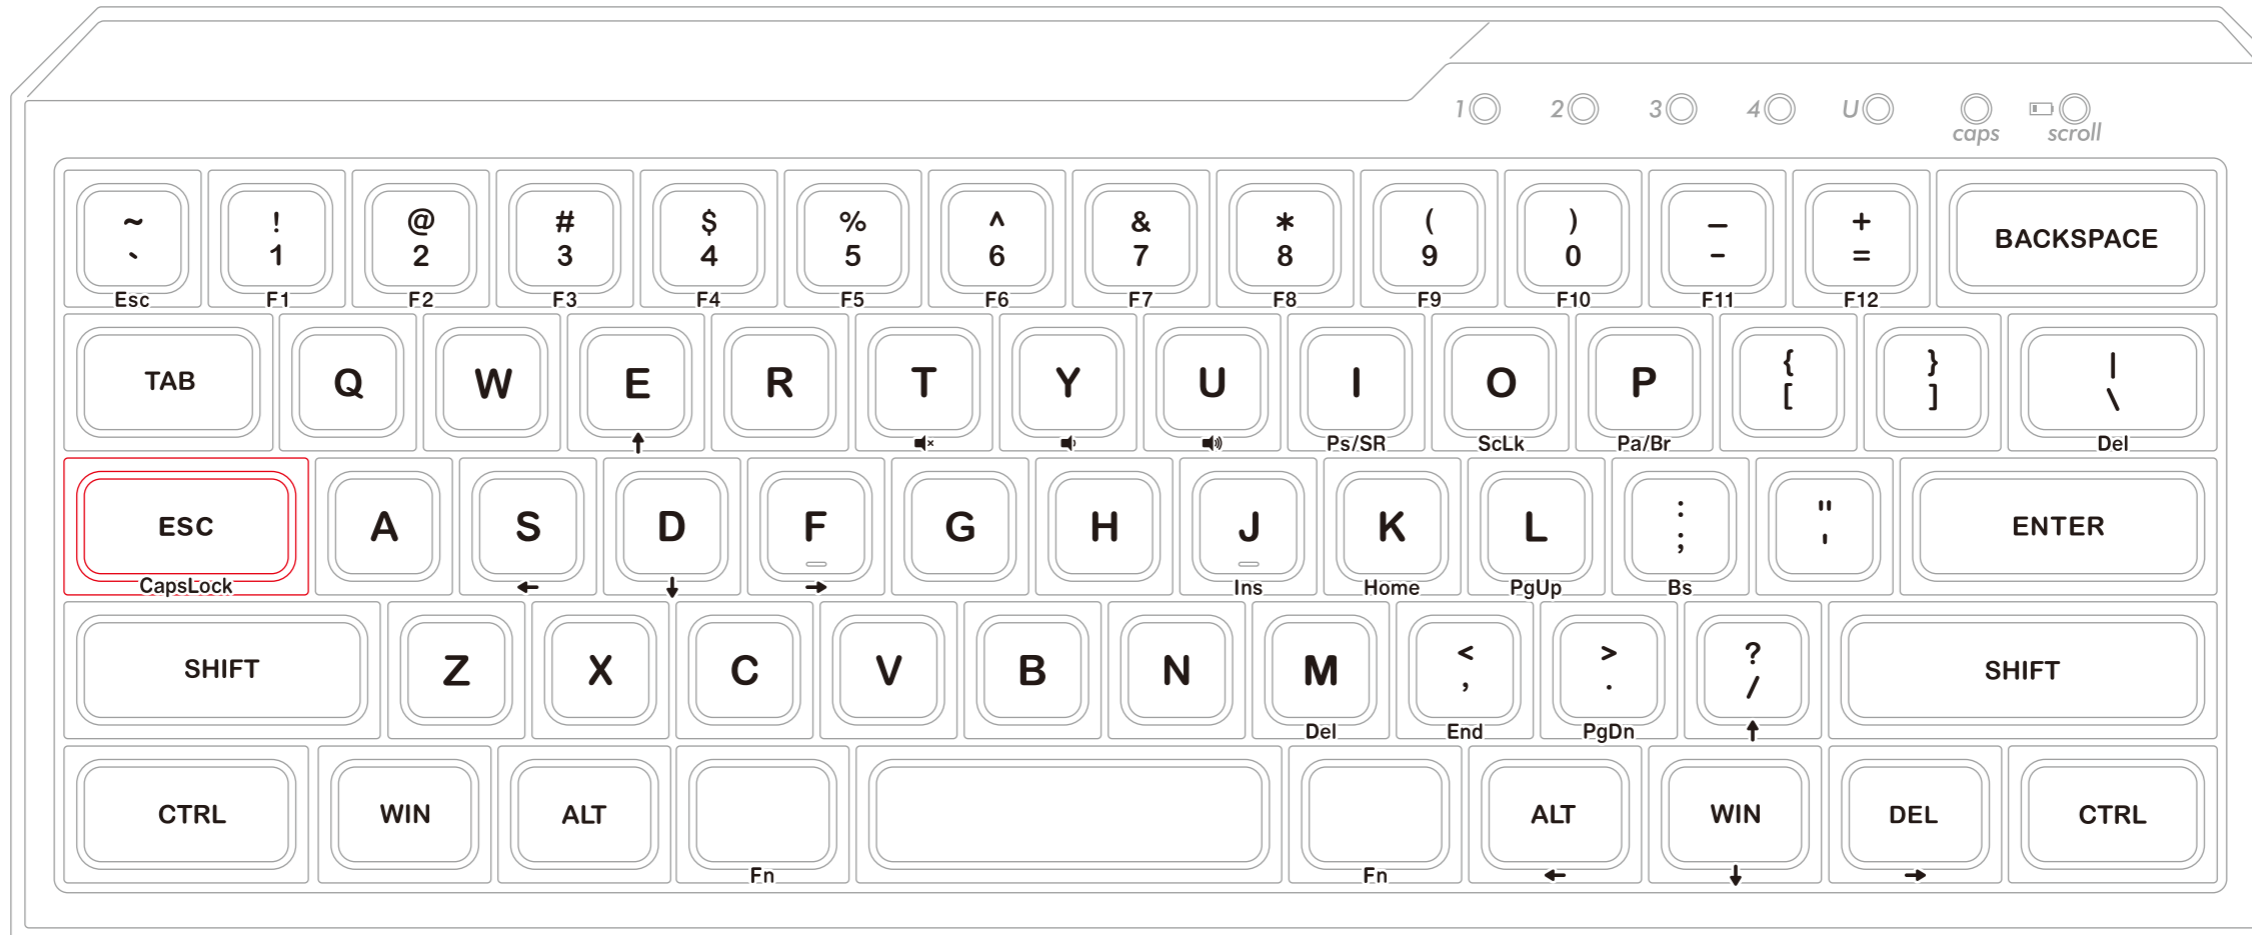


Install ESC key in additional keycap set.

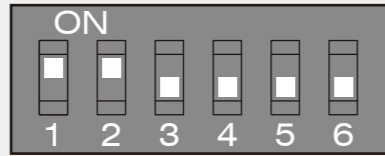

DIP switch 1 and 2 – ON
 Swap CapsLock key and left Ctrl key
 Swap CapsLock key and ESC key



Use Ctrl key as it is and install ESC key in additional keycap set.

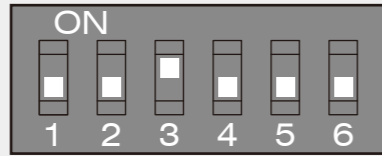

DIP switch 3 – ON

Swap DEL key in a 2nd row from the top far right and [\ |] key, and change DEL key on the bottom row to [\ |] key.




Install DEL key and [\ |] key in additional keycap set.



DIP switch 4 – ON

Validate cursor keys on the right bottom and invalidate cursor keys on E/S/D/F.

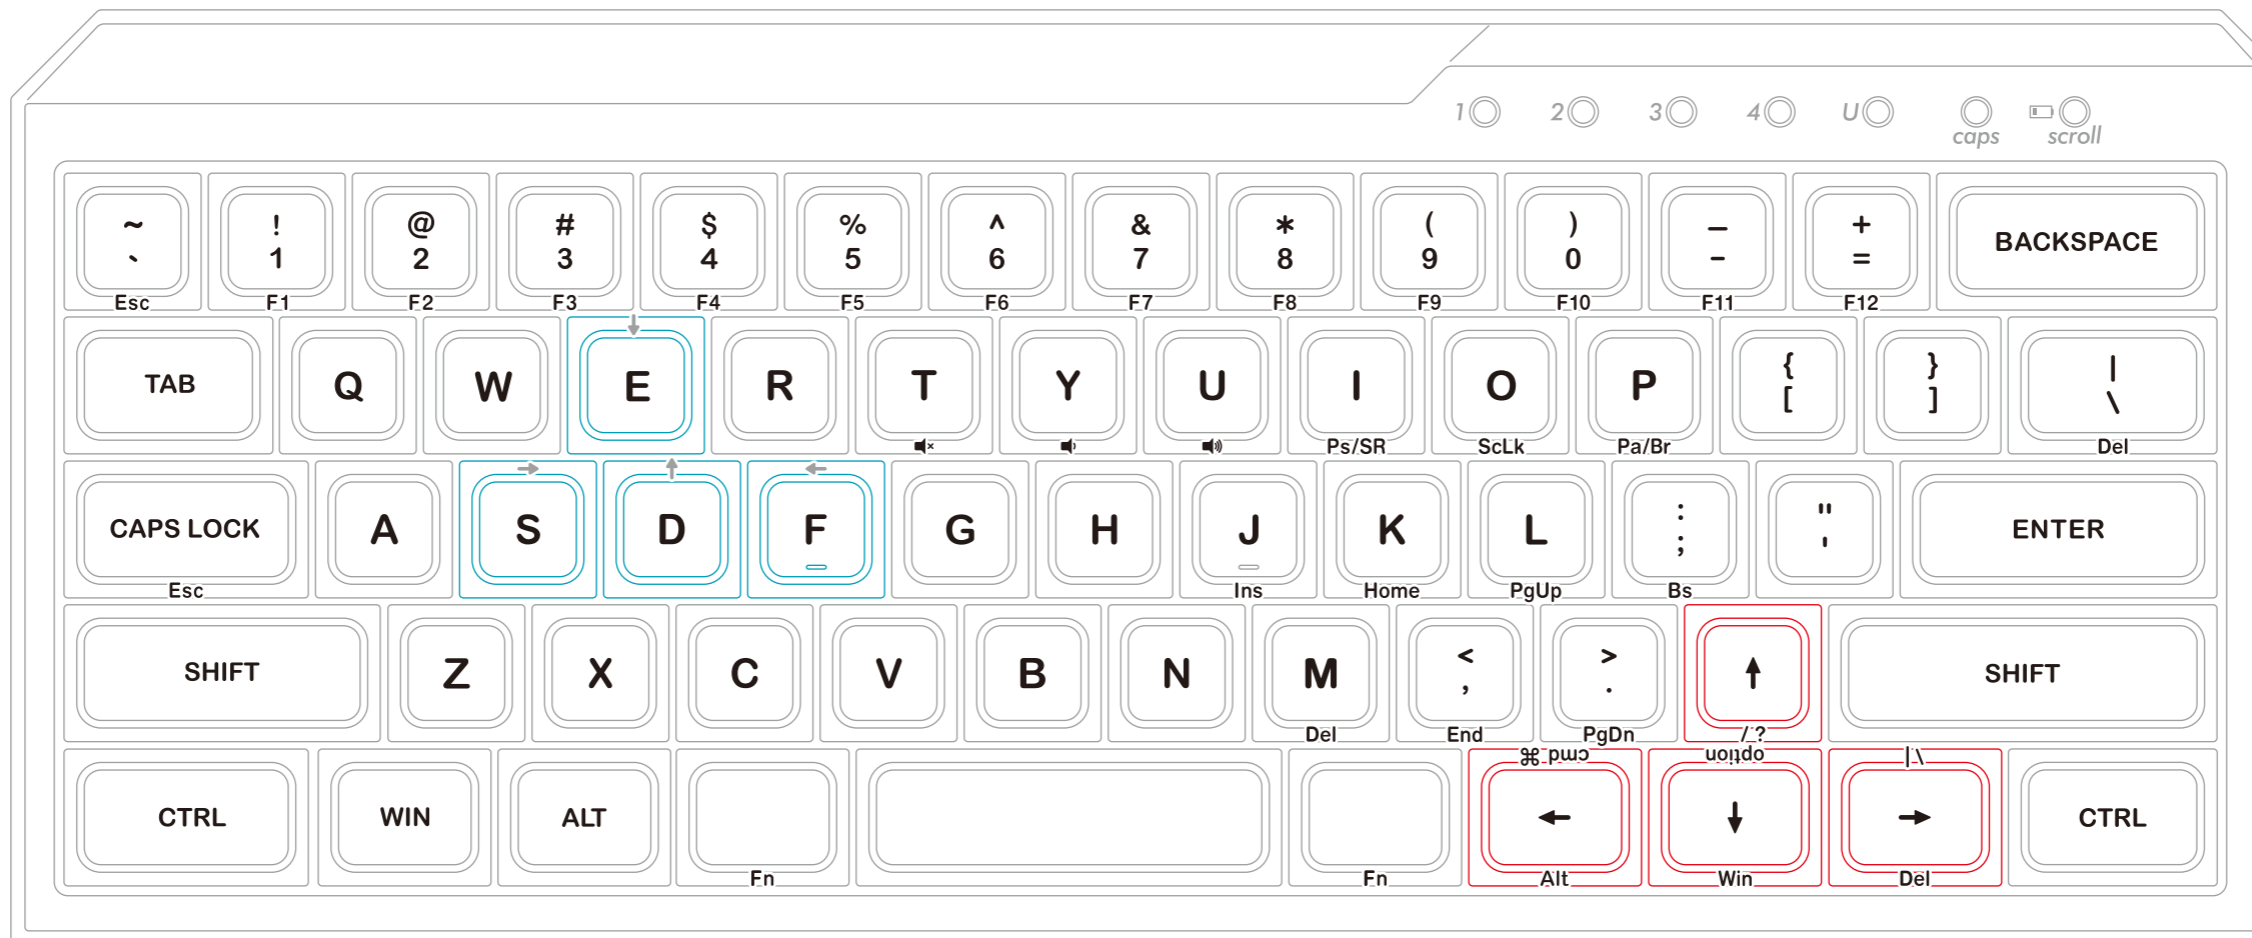

Remove top part of E/S/D/F with included special key puller and rotate bottom part 180 degrees and put top part of E/S/D/F back so that cursor symbols cannot be seen from typing position.


Install cursor keys in additional keycap set.



DIP switch 3 & 4 – ON

Swap DEL key in a 2nd row from the top far right and [\ |] key, and change DEL key on the bottom row to [\ |] key.


Validate cursor keys on the right bottom and invalidate cursor keys on E/S/D/F.

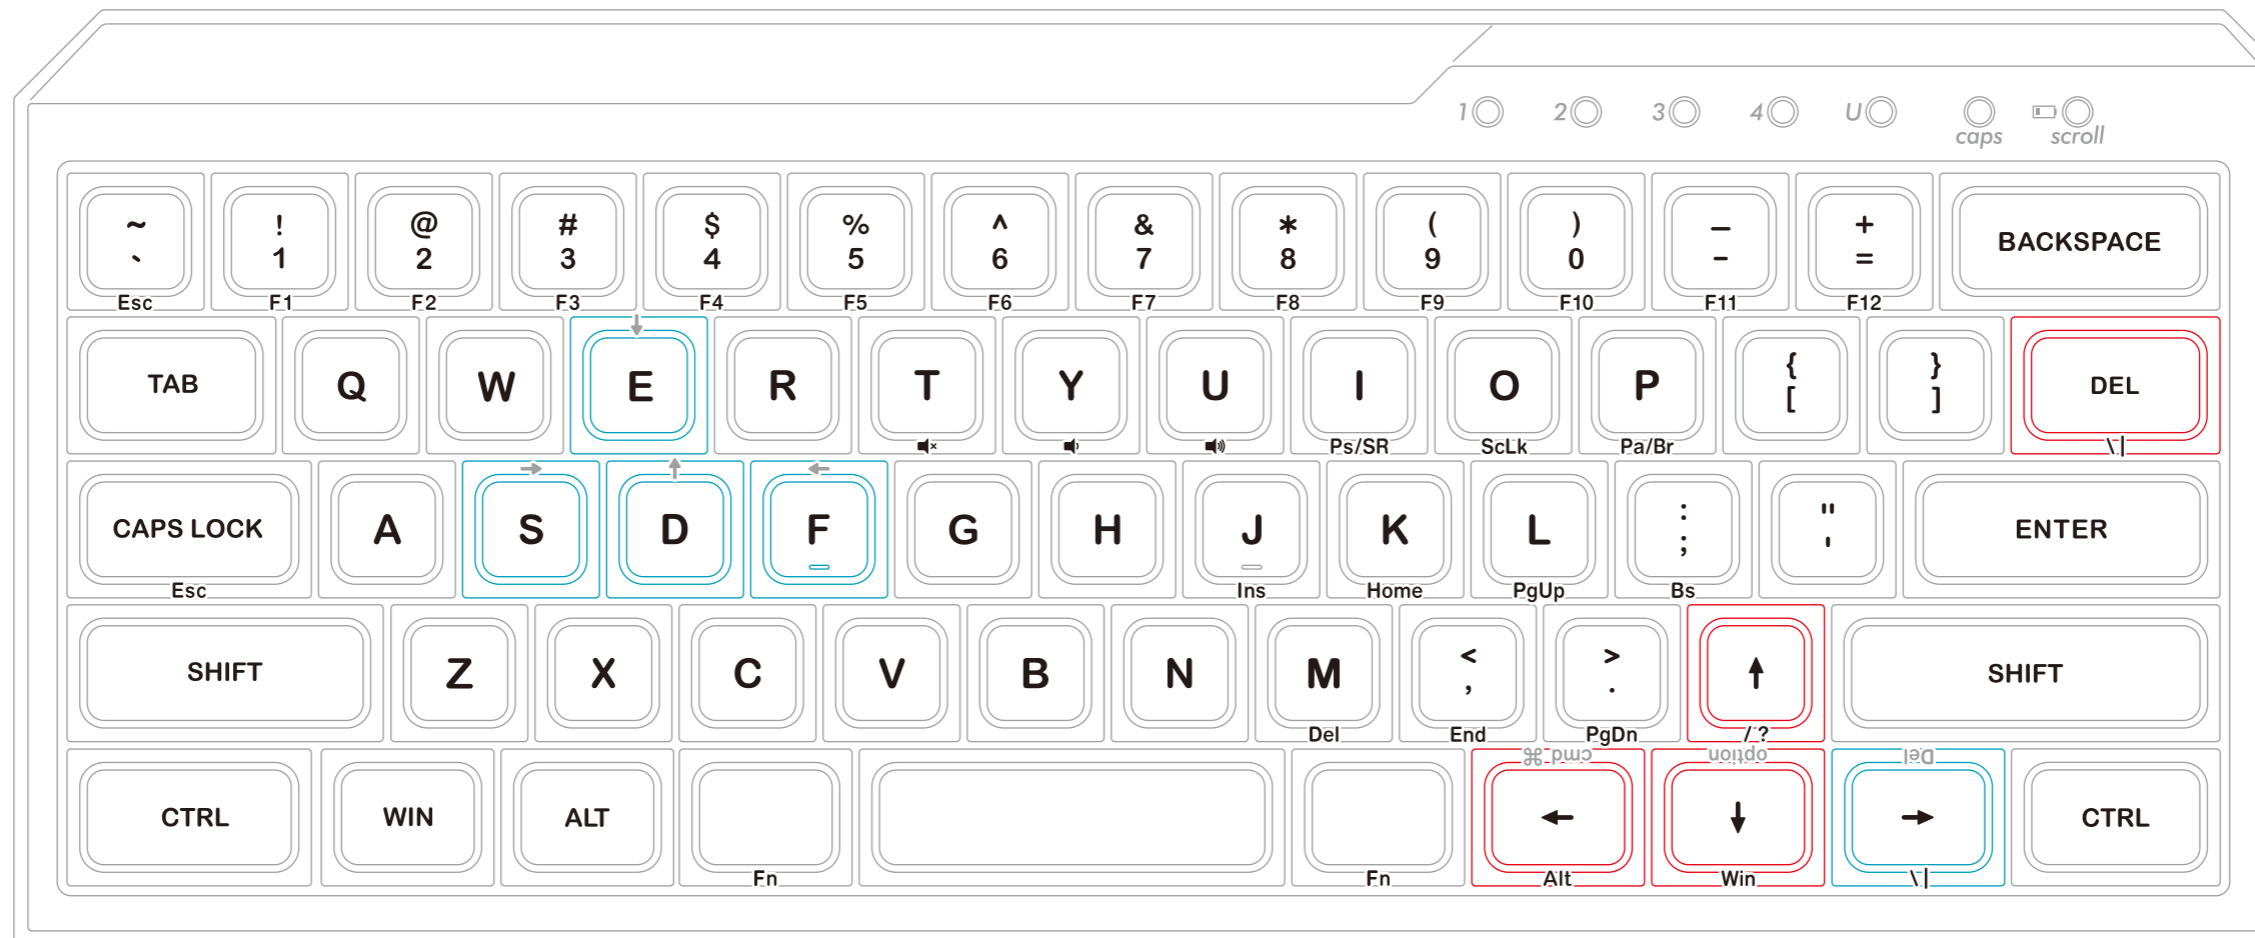


Remove top part of E/S/D/F with included special key puller and rotate bottom part 180 degrees and put top part of E/S/D/F back so that cursor symbols cannot be seen from typing position.

Install ↑, ← and ↓ keys in additional keycap set.
Remove top part of →(Del) key in additional keycap set with included special key puller and rotate bottom part 180 degrees and put top part of →(Del) key back so that [\ |] symbols can be seen from typing position.

Install DEL key in additional keycap set.

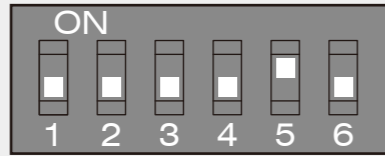

DIP switch 5 – ON
MAC mode

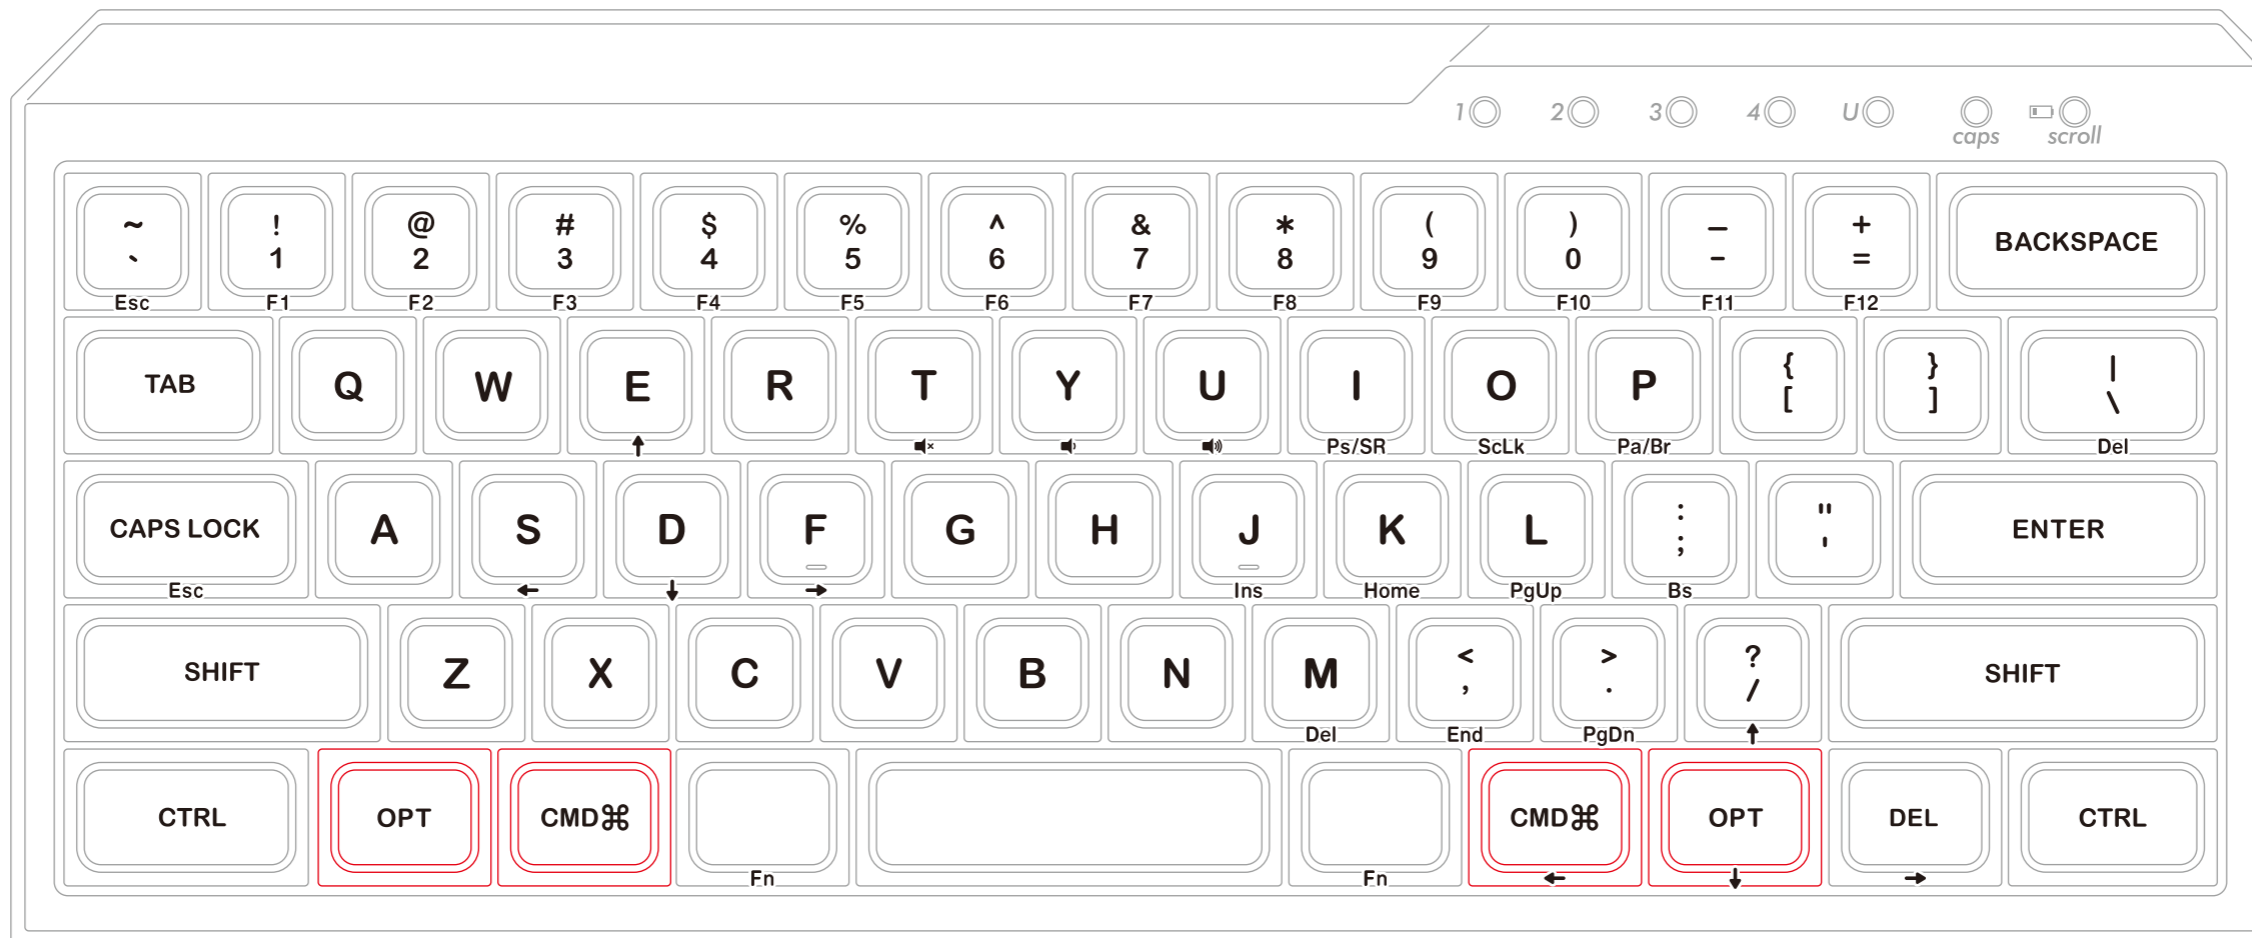


Install OPT key and CMD key in additional keycap set.

Install CMD key and OPT key in additional keycap set.



DIP switch 4 & 5 – ON

Validate cursor keys on the right bottom and invalidate cursor keys on E/S/D/F.
Validate MAC mode.

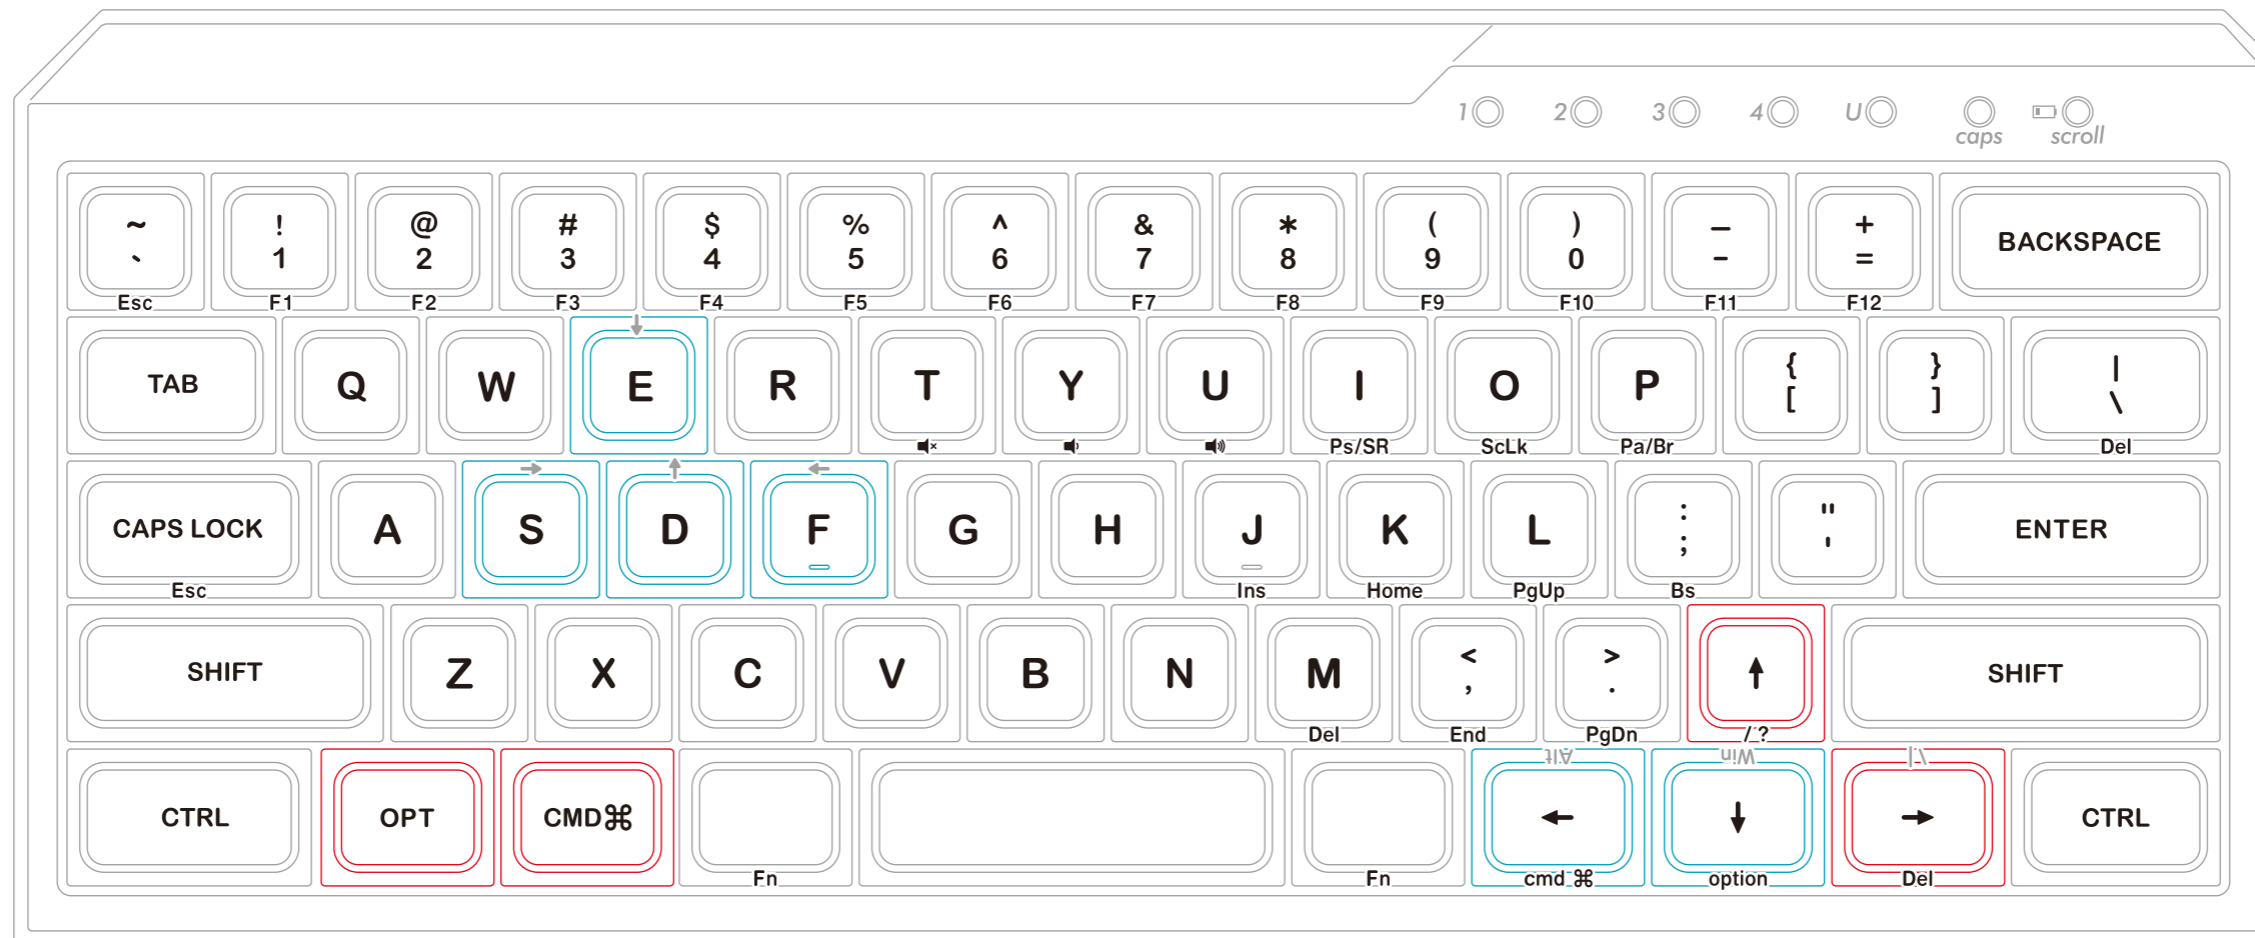

Install OPT key and CMD key in additional keycap set.

Remove top part of E/S/D/F with included special key puller and rotate bottom part 180 degrees and put top part of E/S/D/F back so that cursor symbols cannot be seen from typing position.

Install ↑ and → keys in additional keycap set. Remove top part of ←(Alt) key and ↓(Win) key in additional keycap set and rotate bottom part 180 degrees and put top part of ←(Alt) key and ↓(Win) key so that cmd and option print can be seen from typing position.